

BGSF |

Kangarlussuaq

Local operating procedures for BGSF.

- [General](#)
- [Sondrestrom TWR](#)
- [Sondrestrom APP](#)

General

The largest airport in Greenland, Kangarlussuaq airport (BGSF), also known as Sondrestrom, is a vital link connecting Greenland and the rest of the world. The airport receives a variety of traffic, ranging from international flights on large jet airliners to smaller turboprop domestic connections to the rest of Greenland.

Runway	RWY Dimensions (m)	Heading
09	2810x60	089
27	2810x60	269

List of ATS Positions

Coordination Name	VATSIM Logon	Radio Callsign	Frequency
Sondrestrom Tower (SFT)	BGSF_TWR	"Sondrestrom Tower"	118.300
Sondrestrom Approach (SFA)	BGSF_APP	"Sondrestrom Approach"	126.200

Login Priority

All positions may be opened at any time.

Sondrestrom TWR

Sondrestrom Tower (BGSF_TWR) provides clearance delivery, ground, and tower control.

Delivery

NOTE: Typically, the preferred runway configuration is RWY 09 for arrivals / RWY 27 for departures. See "Runway Configuration" below for more details.

Overview of SIDs

TERMINATING FIX	RUNWAY	
	09	27
BAVKO	1A	1B
GILPO	1A	1B
INPOD	1A	-
ISTEC	1A	1B
KEMOS	1A	1B
WUTAN	1A	1B
<div>Initial Climb</div> <div>FL190 for <u>Eastbound</u> flights (TRK 000-179)</div> <div>FL180 for <u>Westbound</u> flights (TRK 180-359)</div> <div>(or RFL if lower)</div>		

Clearance Procedure

All BGSF departures shall be given the **latest weather** (met report) with their IFR clearance. E.g.,

“☐☐ GRL418, ready to copy clearance and the weather?”

☐☐➔ Ready to copy, GRL418.

☐☐ GRL418, cleared to Keflavik via the WUTAN 1A departure, climb via SID FL190, Mach .80, squawk 3126.

☐☐➔ Cleared to Keflavik via the WUTAN 1A departure, climb via SID FL190, squawk 3126.

☐☐ GRL418, readback correct. Kangarlussuaq met report at time 50, automatic, winds 060 degrees 9 knots, visibility 10 kilometers or more, no directional variation, clouds broken at 21000ft, temperature plus one, dewpoint minus four, QNH 1014.

☐☐➔ QNH 1014, GRL418.

☐☐ GRL418, readback correct.


RWY 27 Departure Procedure (Non-RNAV)

Non-RNAV aircraft shall be instructed to depart RWY 27, with the following departure instructions: *"After departure runway 27 climb straight ahead, passing 5300ft proceed direct [first waypoint of flight plan], then flight planned route, initial climb FL[180/190]..."*

This is necessary to avoid high terrain near the airport. 5300ft is the MSA (Minimum Safe Altitude) within 25 NM of BGSF.

The same initial climb applies as for the SIDs (FL190 for Eastbound departures / FL180 for Westbound, or RFL if lower.)

Ground

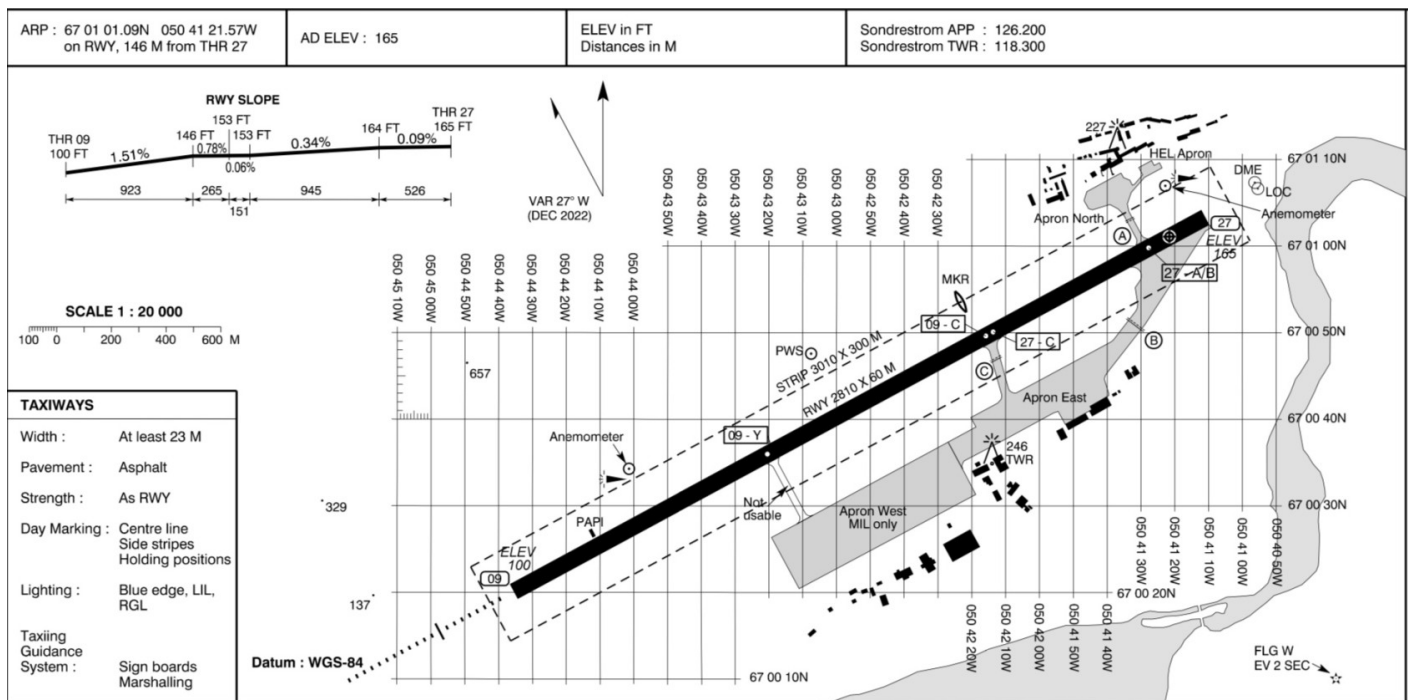

There are three main parking locations at BGSF:

- The **North Apron** is for scheduled passenger flights.
- The **East Apron** is for cargo and general aviation.
- The **West Apron** is for military operations.

Otherwise, BGSF has a fairly simple ground layout. The most important thing to note is that in the usual runway configuration (RWY 09 arrivals / RWY 27 departures), if an arrival requires full length for landing, it would likely vacate the runway from the same taxiways as departing aircraft would be holding short at. Controllers may consider instructing arrivals to make a 180 and backtrack to vacate, in order to avoid coming face-to-face with departing aircraft.

Tower

Runway Configuration


Due to high terrain near the airport, **RWY 09** is the preferred arrival runway and **RWY 27** is the preferred departure runway. Therefore, if the tailwind component for both runways is less than **10 KTS**, TWR shall designate RWY 09 as the arrival runway and RWY 27 as the departure runway.

In this configuration, **departures will depart into the arrival path.** Typically this is not an issue due to BGSF's low traffic levels, but TWR must coordinate with APP to ensure that large enough gaps are left in the arrival stream for aircraft to depart between arrivals.

When the tailwind component exceeds 10 KTS for either RWY 09 or RWY 27, TWR shall revise the runway configuration to depart & arrive on whichever runway has the strongest headwind component. The only exception is if conditions are IMC and/or if the ceiling is lower than 2200ft, in which case **RWY 27 must be used for departure.**

In periods of heavy traffic (assuming visibility is sufficient), TWR may also revise the runway configuration to use the same runway for departure/arrival, if it is expected that using opposite runways for departure and arrival would cause significant delays.

Sondre Stromfjord Control Zone (BGSF CTR)

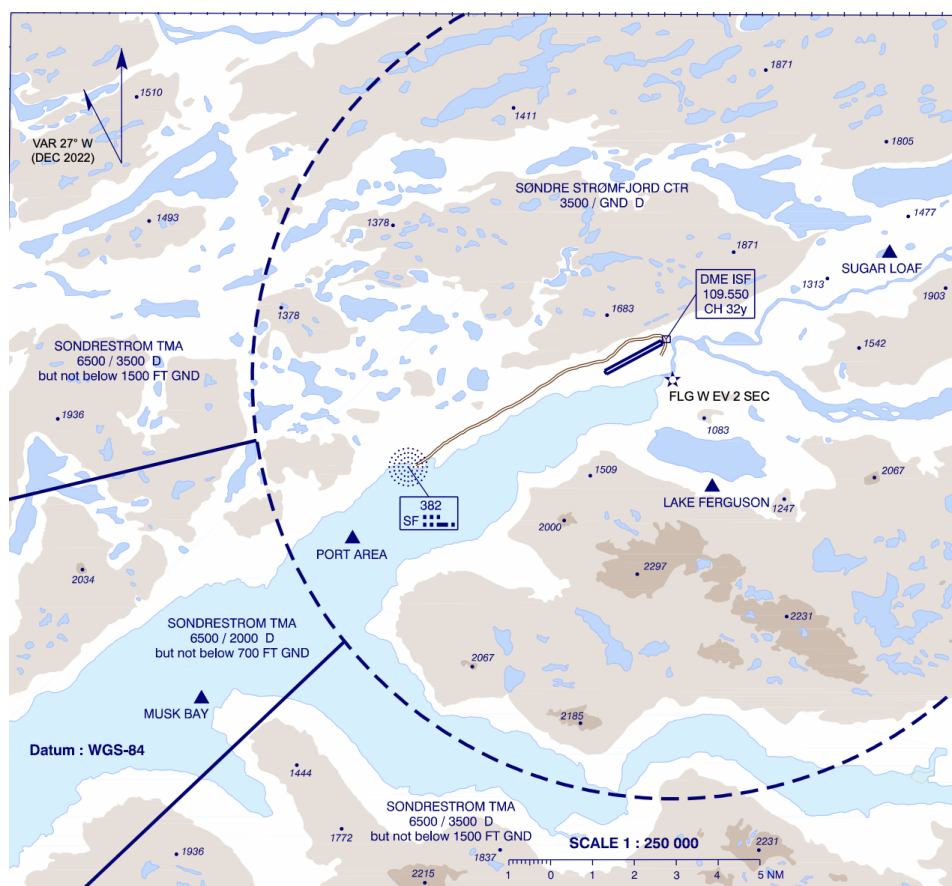

Note: the northeastern-most area of the BGSF CTR is cut off in the above image.

The Sondre Stromfjord Control Zone (BGSF CTR) surrounds BGSF from GND – 3500ft.

There are three visual reporting points which aircraft may follow while entering/exiting the CTR – Port Area, Musk Bay, and Sugar Loaf.

Due to surrounding high terrain, a **left** hand traffic pattern is preferred for RWY 27, and a **right** hand traffic pattern is preferred for RWY 09.

Missed Approaches

TWR shall instruct aircraft to follow the standard missed approach, and coordinate all missed approaches with APP prior to transferring to APP.


For aircraft unable the standard missed approach, TWR should instruct them to perform a visual climb and caution them of high terrain. The MSA within 25 NM of BGSF is **5300ft.**

Sondrestrom APP

Sondrestrom Approach (BGSF_APP) provides an approach control service within the Sondrestrom TMA and CTA.

Sondrestrom TMA & CTA

The Sondrestrom TMA and CTA together make up the airspace controlled by Sondrestrom Approach.

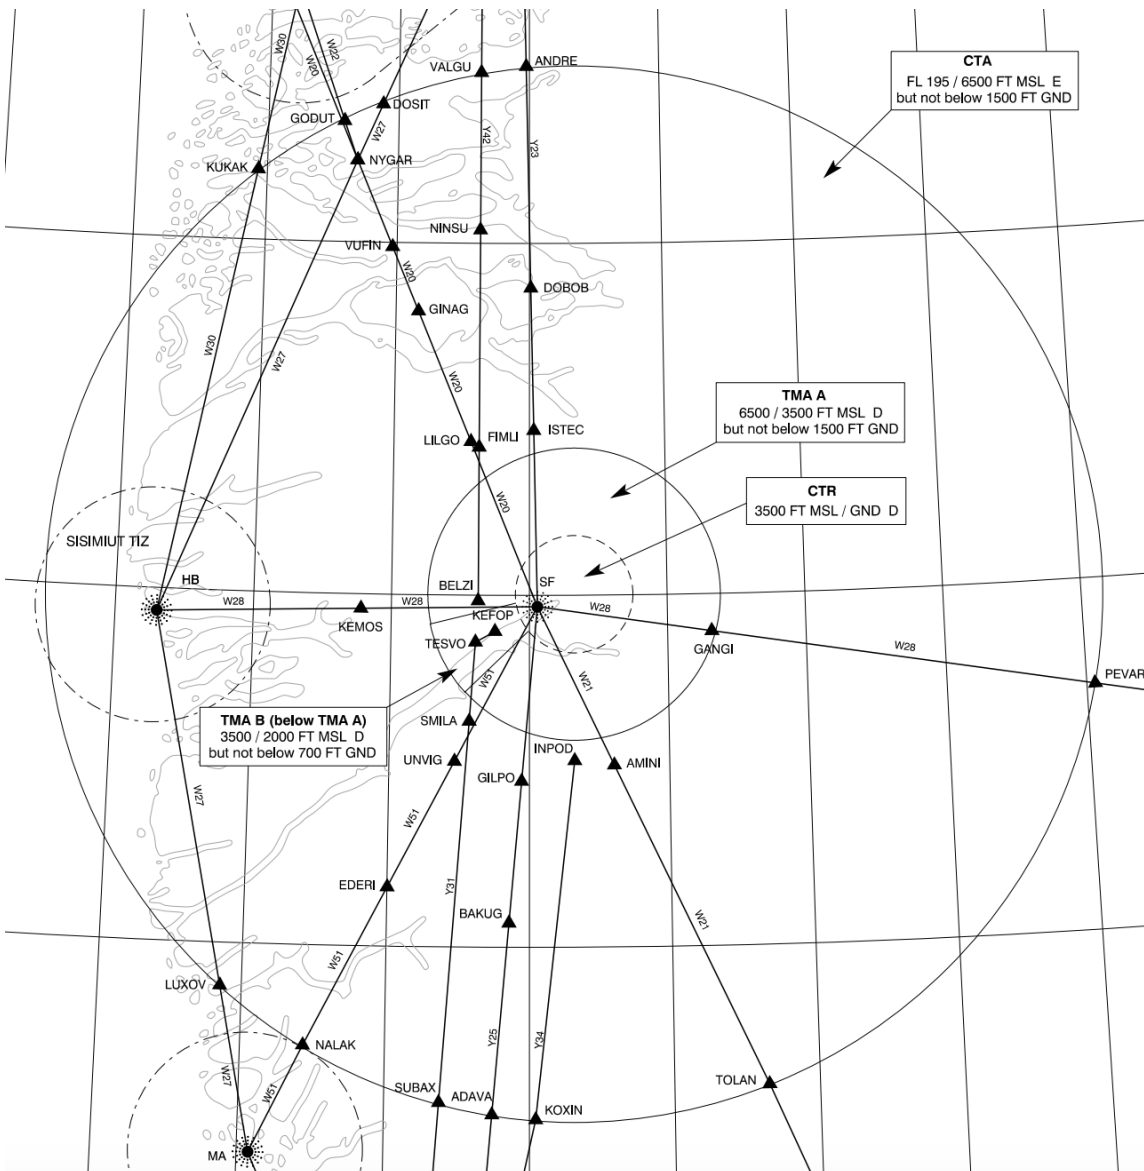

The CTA and TMA are arranged as three sections of cylindrical airspace.

- The **CTA** (6500ft – FL195) is the largest cylinder of airspace.
- **TMA A** (3500 – 6500ft), the main portion of the TMA, forms a smaller cylinder beneath the CTA.
- **TMA B** (2000 – 3500ft) is a small cylindrical segment, extending the TMA downwards to encompass the RWY 09 approach path. It directly underlies TMA A.

Arrivals

There are no STARs into BGSF. Aircraft generally join the instrument approach procedures directly from their flight plan route.

Runway 09

The RNP approach for RWY 09 is the preferred approach type. Aircraft should be cleared to either of the IAFs (DODIP or BELZI) and descended to the initial approach altitudes as published:

- **DODIP:** 5200ft
- **BELZI:** 4900ft

Missed Approach

TWR shall instruct aircraft to follow the standard missed approach. The standard missed approach varies between approaches:

- **RNP:** Climb runway track, passing 2500ft left turn direct SFT09, then direct KEFOP, climbing to 4000ft.
- **LOC Z/Y:** Climb on LOC course until the marker, then turn right track 103, passing 4000ft direct SF NDB, climbing to 4400ft.
- **NDB Z/Y:** At D2.5 ISF climb to 3000ft on track 097, then turn right direct SF NDB, climbing to 4400ft.
- **RNP A/B (RWY 27):** Climb on course 274, passing 3000ft direct KEFOP, climbing to 4000ft.

Strict adherence to the standard missed approaches is critical due to high terrain surrounding the airport.

TWR shall instruct aircraft unable the standard missed approach to perform a visual climb.

TWR shall coordinate all missed approaches with APP prior to transferring back to APP.

Non-Standard Approaches (RWY 09)

If aircraft are unable to accept the RNP approach, then alternative approaches should be offered in order of precision.

LOC Z/Y

There are two published localizer approaches – LOC Z (for category A and B aircraft) and LOC Y (for category C and D aircraft.) They are both teardrop procedures, starting from SF NDB and making a left turn inbound for the localizer.

As both procedures descend into the BGSF CTR, APP should coordinate with TWR to make them aware if the approaches are used.

NDB Z/Y

There are, similarly two NDB approaches – NDB Z (for category A and B) and NDB Y (for category C and D.) They are also teardrop procedures, except instead of using the localizer, aircraft fly a final approach course towards SF NDB and the runway.

As both procedures descend into the BGSF CTR, APP should coordinate with TWR to make them aware if the approaches are used.


Runway 27

While not officially published for RWY 27, there are two RNP approaches available which lead aircraft to RWY 27. (RNP A for categories A and B, and RNP B for categories C and D.)

Aircraft should be cleared to one of the three IAFs (RUMAQ, FICWE, or KEFOP) and descended to the initial approach altitudes as published:

- **RUMAQ:** 4000ft
- **FICWE:** 5000ft
- **RIVOP:** 4700ft

Alternatively, aircraft may perform a visual approach.



Circle-to-land is **not permitted** north of the aerodrome.

Departures

Aircraft shall follow either their SID, or the non-RNAV RWY 27 departure procedure of climbing on runway track, then when passing 5300ft, proceeding direct to join their flight planned route.

Strict adherence to the SID is required below the MSA (5300ft) due to high terrain. After passing the MSA, APP may issue a direct to the end of the SID, traffic permitting.